

가정용 펌프

●● 얇은우물용





질소탱크타입

■ 위생적이고 공기보급이 필요없음.



PH-160A
자흡자동식, 프리임펠러

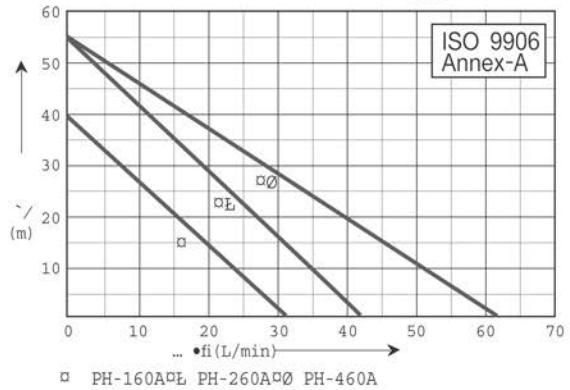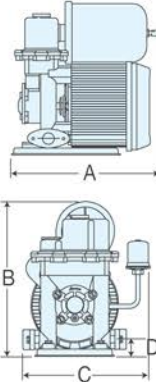



형식	상수전압 (V.AC)	정격출력 (HP)	전부하시 입력(W)	전양정 (m)	최대양수량(L/h) 전양정(m)시	흡상고 (m)	압상고 (m)	흡·토출경 (mm)	중량 (kg)	제품크기(mm) A×B×C×D
① PH-160A	단상 220	1/6	300	15	1,900(0.5)	8	7	20(A)	13	278×295×234×32
② PH-260A		1/3	580	24	2,560(0.5)		16	25(A) 20(A)	15	277×293×239×41
③ PH-460A		1/2	850	24	3,530(0.5)		16	32(A)	17	298×291×255×56

질소탱크타입

■ 전폐형 알루미늄 전동기 프레임 채택.



PH-125A-G
자흡자동식, 프리임펠러

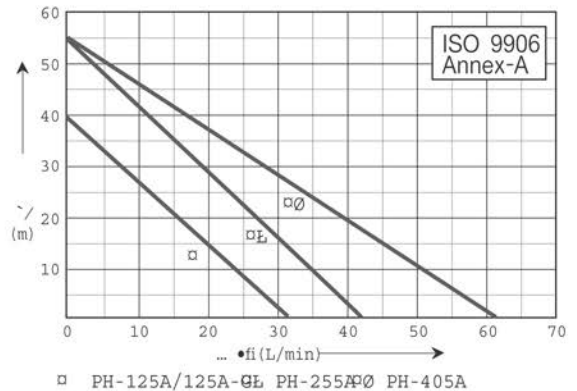
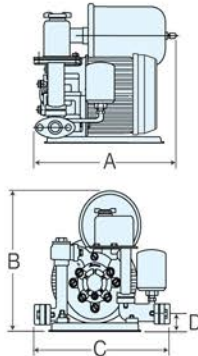


형식	상수전압 (V.AC)	정격출력 (HP)	전부하시 입력(W)	전양정 (m)	최대양수량(L/h) 전양정(m)시	흡상고 (m)	압상고 (m)	흡·토출경 (mm)	중량 (kg)	제품크기(mm) A×B×C×D
① PH-125A-G	단상 220	1/6	300	18	1,600(0.5)	8	10	15(A)	9.1	272×286×284×33
② PH-125A		1/6	300	15	1,900(0.5)		7	20(A)	9.1	272×286×284×33
③ PH-255A		1/3	580	24	2,560(0.5)		16	25(A) 20(A)	10.7	280×299×311×35
④ PH-405A		1/2	850	24	3,530(0.5)		16	32(A) 25(A)	17.7	309×310×320×63

■ 전폐형 알루미늄 전동기 프레임 채택.
■ PP-750 압력탱크 사용시 자동.(별매)



PH-125W
자흡비자동식, 프리임펠러

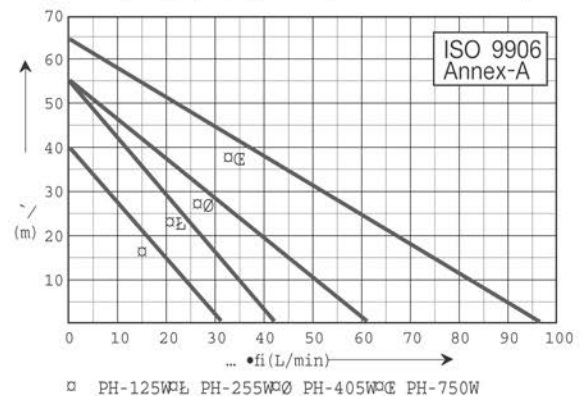

형식	상수전압 (V.AC)	정격출력 (HP)	전부하시 입력(W)	전양정 (m)	최대양수량(L/h) 전양정(m)시	흡상고 (m)	압상고 (m)	흡·토출경 (mm)	중량 (kg)	제품크기(mm) A×B×C×D
① PH-125W	단상 220	1/6	350	21	1,900(0.5)	8	13	20(A)	7.9	272×219×284×33
② PH-255W		1/3	580	32	2,560(0.5)		24	25(A) 20(A)	9.3	280×242×311×35
③ PH-405W		1/2	850	37	3,530(0.5)		29	32(A) 25(A)	15.8	309×256×320×63
④ PH-750W		1	1,500	37	5,770(0.5)		29	40(A) 30(A)	26	309×290×341×62